


# Clearances - to suit FF, FF R, CAS, FS ranges

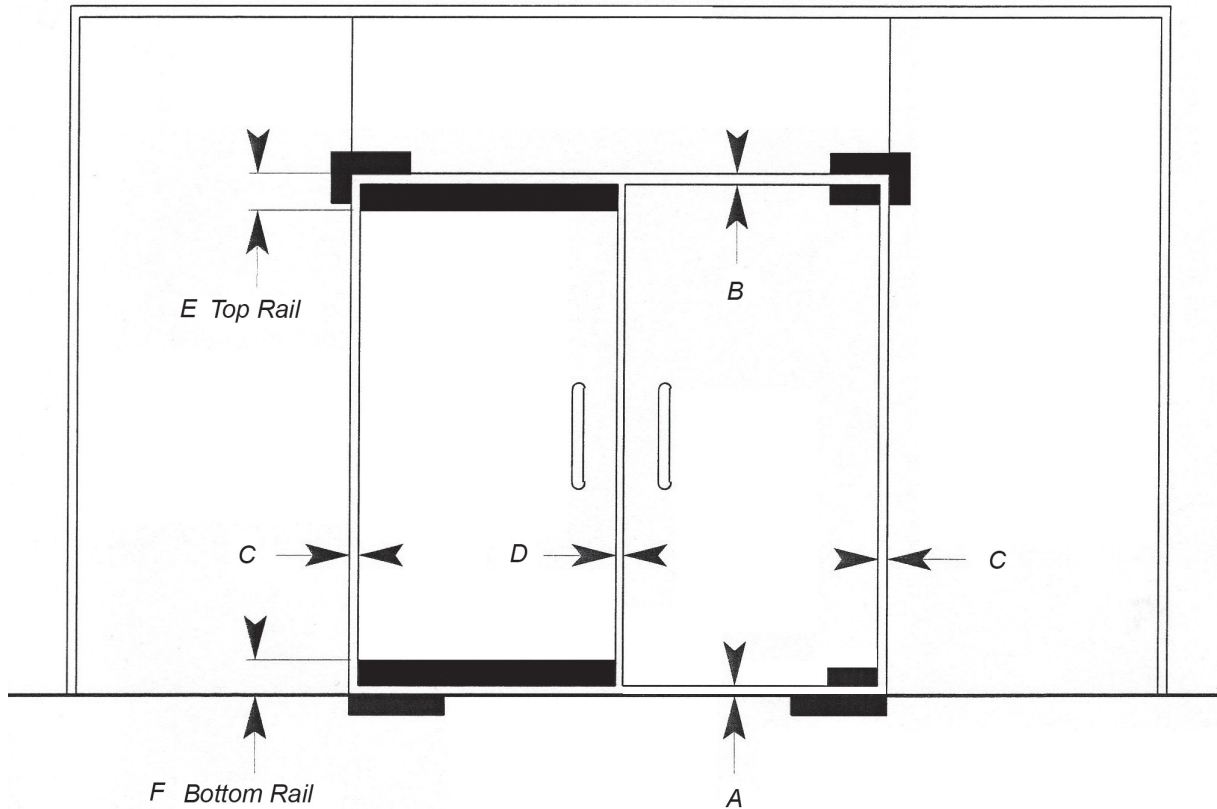


A:	Bottom patch (with 0mm spindle supplied standard)	10mm
B:	Top patch	4mm – 5mm
C:	Side clearance	4mm
D:	Double door clearance	3mm – 5mm
E:	Top rail (including 63mm for rail and 4mm for head clearance)	67mm
F:	Bottom rail (including 63mm for rail and 10mm for floor clearance)	73mm

## EXTENDED SPINDLES

	Clearance under door	Increase to clearance A or F
0mm	10mm	Nil
5mm	15mm	5
10mm	20mm	10
15mm	25mm	15
20mm	30mm	20
25mm	35mm	25
30mm	40mm	30

# Door Clearances - FGS Acclaim Range

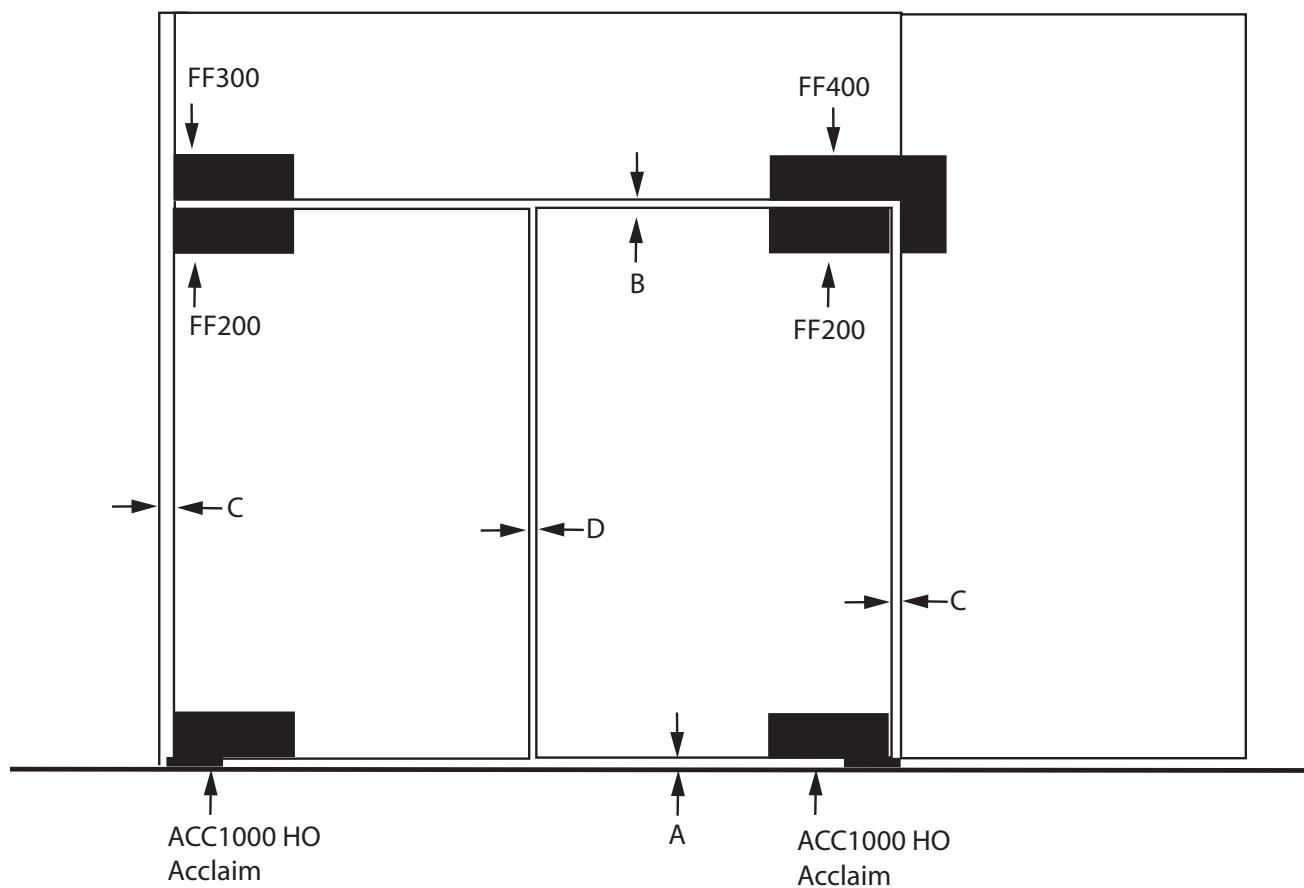

A:	Bottom Clearance	12mm
B:	Top Clearance	4mm – 5mm
C:	Side clearance	5mm
D:	Double door clearance	3mm – 5mm